







5300

cord-operated

for sheers or medium-weight curtains

Stable track with a slim look design

5300



cord-operated

for sheers or medium-weight curtains

stable & slim-looking

The Qurails 5300 track is a stable, slim-look design cord-operated track. The curtains glide smoothly virtually without sound. Using the cord to open and close the curtains keeps the fabric clean. A very popular track that can be used in a wide variety of situations, such as private homes, but also in office buildings and in the care sector.

- The ideal track for sheers or medium-heavy curtains.
- Easy to bend and exceptional quality.
- Can be forward or reverse bent in different radii.
- Compatible with the Qurails Flow System for regularly pleated curtains.
- The cords can run through enclosed channels to ensure they remain invisible and cannot tangle.
- Silent and smooth running, also round bends.



Standard colours





High quality, wear-resistant coating, highly colourfast, UV-resistant. Other RAL colours & special coatings on request.

Features


Material: aluminium

Colour: white, natural metallic

Dimensions: 24 x 16 mm
Weight profile: 345 gr/m¹
Mounting: wall or ceiling

Profile specifications

Aluminium profile:



Colours with RAL code and lengths

	RAL	4	5	6	7
white	9010			•	•
natural metallic	9006			•	

Mounting surface:

- wood
- masonry/concrete

Bracket type:

- ceiling bracket
- wall bracket
- spacer bracket

Bending:

bending radius	bending tool		
R 15 cm	1015		
R 20 cm	1015		
R 25 cm	1015		
R>100 cm	1018		
R 15 cm R > 100 cm			

Flow


The Qurails Flow System keeps pleats in curtains consistent. It can be used with small and wide channel tracks and, because of the broad assortment of components, it can be integrated in hand-drawn, cordpulled and electrically operated systems.


The Flow System can also be used with curved curtain tracks. For further information, see the Flow product data

Specification guide **Material**

- Aluminium EN AW-6060-T66.
- Anodised in accordance with the Qualanod standard.
- Powder coated in accordance with the Qualicoat standard.


Mounting






Ceiling mounting with ceiling bracket 5350


Ceiling mounting with double bracket 2216 and ceiling bracket 5350






Wall mounting with wall bracket 5351

Method to release the 4800 from wall bracket 5351




Wall mounting with extension bracket 2015 and ceiling brackets 5350

Combination example



Exploded view

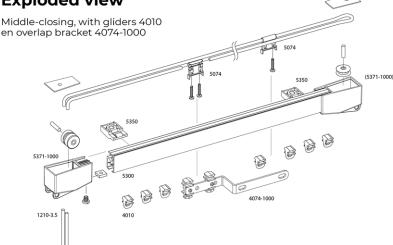

Standard parts

Curtain transport



4010 glider white / grey / black

Mounting



5350 ceiling bracket white



wall bracket white

Accessories





5352 connecting bridge

Optional parts

Curtain transport



4003 spring stop plastic requires punch hole



rotating glider white/ grey / silver / black



4010-50 glider white with plastic hook 2023



4012 click-in glider white



4020 heavy duty glider white / grey / black



5371-1000 pulley set white / grey



5074 pilot runner white



5174-3000 carrier with overlap white / natural metallic



5175-3010 carrier without overlap white / natural metallic



2020 double hook white



2021 G-Hook white



2022 curtain hook white



2023 curtain hook white



2024-55 adjustable sew in hook white 55mm



2024-95 adjustable sew in hook white 95mm

Mounting



2015 extension bracket 5, 7.5, 10 of 15 cm white / natural metallic / black



2018
extension bracket
heavy duty 15 cm
white / natural metallic



2019
extension bracket heavy
duty 20, 25 of 30 cm
white / natural metallic
/ black

Accessories



1203-13 cord weight white / grey / black



1210-3.5 cord 3.5mm white on reel 300m



1201 cord tensioner

Technical specifications are subject to change without prior notice.

