



2906

hand-drawn

for light and medium-weight curtains

One rail, many possibilities

2906



hand-drawn

for light and medium-weight curtains

versatile & discreet

The Qurails 2906 multichannel profile is the ideal track for combining sheers and (blackout) curtains. Mount just one track to have three rail channels. Because of the low profile height of 8mm, the track is barely visible. The track can be quickly and easily mounted on a ceiling or in a window opening.

- The ideal track for combining sheers and lightweight or medium-heavy curtains.
- Concealed mounting on a ceiling.
- Silent and smooth running.



Standard colours




High quality, wear-resistant coating, highly colourfast, UV-resistant.
Other RAL colours & special coatings on request.

Features

Material:	aluminium
Colour:	white
Dimensions:	8 x 100 mm
Weight profile:	741 gr/m
Mounting:	ceiling

Profile specifications

Aluminium profile:



Colours with RAL code and lengths (m):

	RAL	4	5	6	7
white	9010	•		•	

Mounting surface:

- wood
- masonry/concrete


Bracket type:

- screw mounting

Bending:

The 2906 cannot be bent; a separate return bend can, however, be mounted on the front channel of the 2901. The minimum bending radius of the 2901 is R20.

Mounting

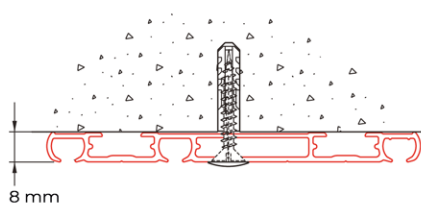

8 mm


Ceiling mounting of a pre-punched 2906 with 2914-WD screws with white caps.

Mounting guideline




The distance between the brackets can vary depending on the following factors: the mounting surface (wood, concrete or plaster), the weight of the curtains and the curtain fabric production method, the specific application and the system usage intensity. General advice: with the curtains open, place additional brackets where the pleats bunch together. Also place additional brackets before and after bends.

drill hole distances:	always 10cm	90cm max. ca. 80cm avg.	90cm max. ca. 80cm avg.	90cm max. ca. 80cm avg.	90cm max. ca. 80cm avg.	always 10cm
-----------------------	-------------	-------------------------	-------------------------	-------------------------	-------------------------	-------------

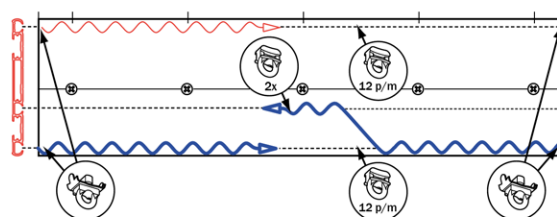

Application example



Combination of wide profiles like 2905 and 2906 with a 90-degree return 2901-R-W, 2 channel, joined with a connecting bridge 2952.

Specification guide

Material

- Aluminium EN AW-6060-T66.
- Anodised in accordance with the Qualanod standard.
- Powder coated in accordance with the Qualicoat standard.


Standard parts



Curtain transport



2001
twist end stop
white / grey / black



2010
glider
white / grey / black

Mounting



2914
screw with
white cover

Accessories



2953-56
end cap white



2952
connecting bridge
natural

Optional parts

Curtain transport




2001-50-M-N
end stop with eye
metal natural



2004
brake glider
white / grey / black



4074-1000
carrier with overlap,
a.o. for draw rod
white / natural metallic
/ black



4075-1000
carrier without overlap,
a.o. for draw rod white
/ natural metallic /
black



2010-50
glider 2010 with
hook 2023 white



2010-60
glider 2010-W
with SS hook
white



2012-50
click-in glider
with hook
white



2012
double hook
white



2020
G-Hook
white



2021
curtain hook
white



2022
curtain hook
white



2023
curtain hook
white



2024-55
adjustable sew
in hook white
55mm



2024-95
adjustable sew
in hook white
95mm

Accessories



2901-R
curve 90 degree R20
return + 2952
white



7399
plexiglass
draw rod
transparent

Technical specifications are subject to
change without prior notice.

Qurails®
Powered by GOELST.